


MT-14 ROLLERBLADE

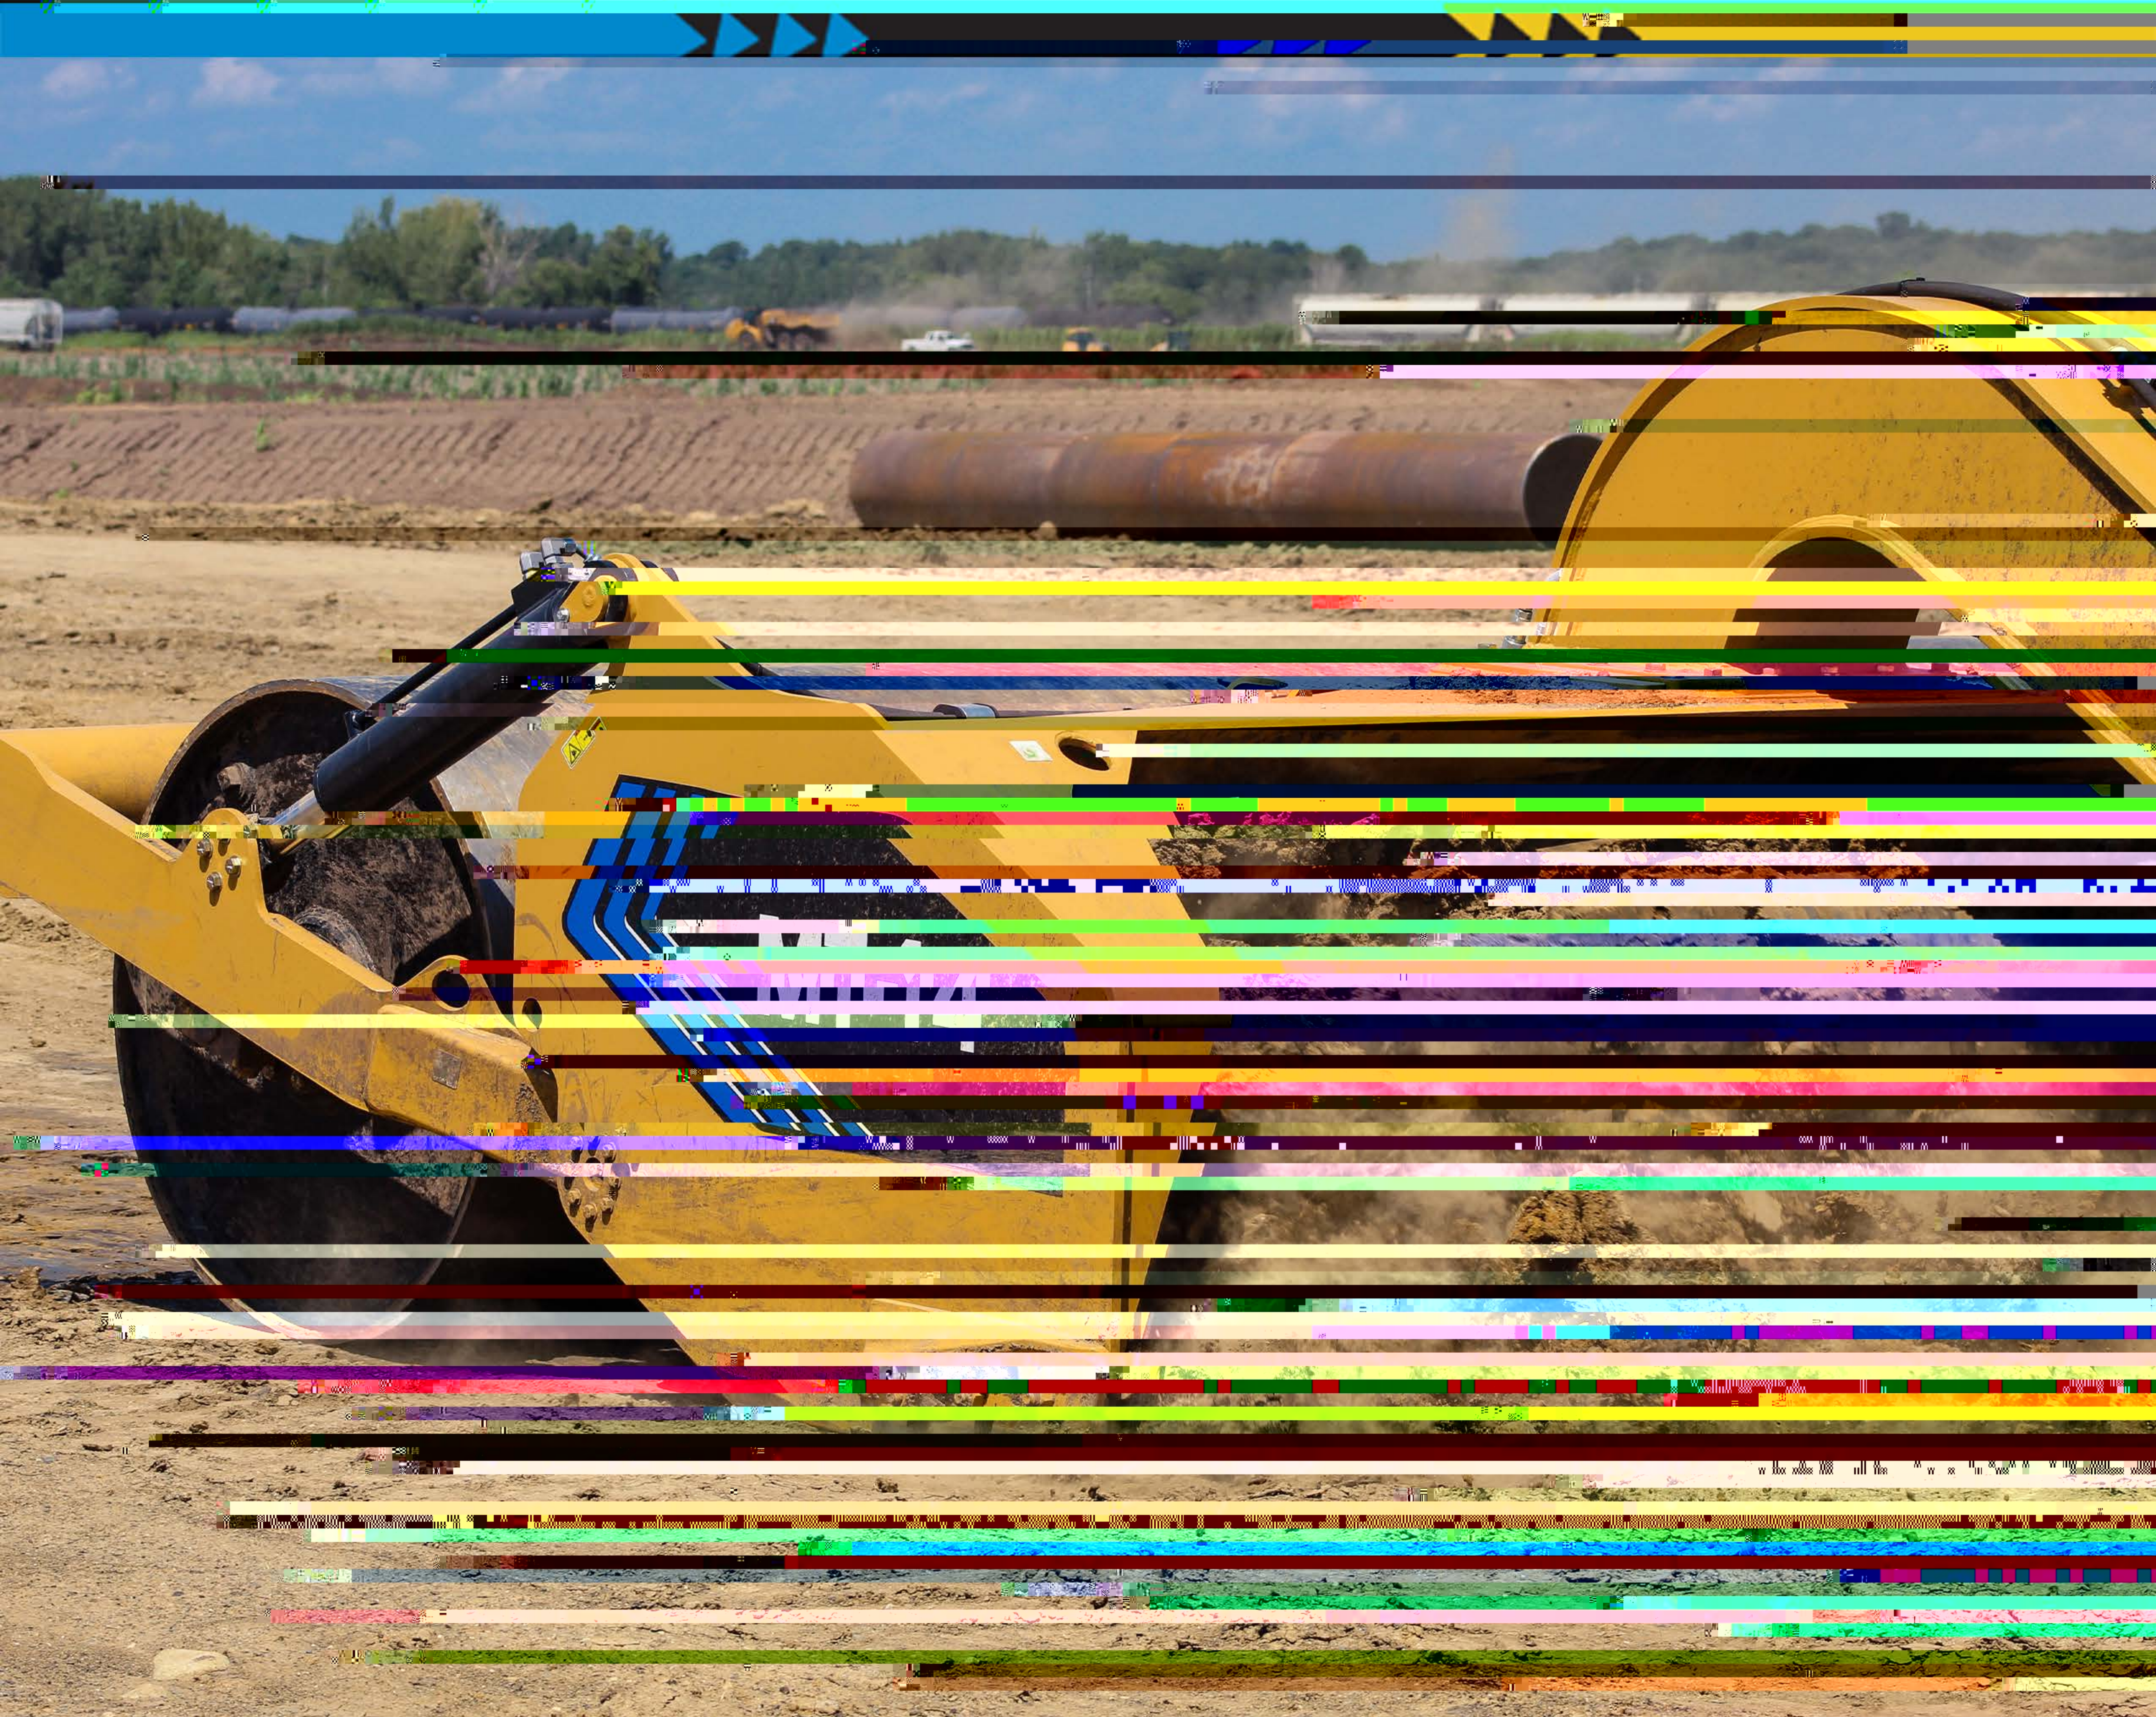

MOBILE TRACK SOLUTIONS

MOVING TRACKS FORWARD

A young company with a long history



mobiletracksolutions.com

Elkader, IA
(515) 271-1071

MT-14 SPECIFICATIONS

5 Overall Width	165 in	4,191 mm
4 Overall Length	250 in	6,350 mm
6 Overall Height	76 in	1,930 mm
3 Width (Inside of Tires)	89 in	2,261 mm
2 Wheelbase (Center to Center)	122 in	3,100 mm
Total Weight	17,400 lbs	7,876.396 kg
Recommended Pull Unit	Min 250 hp	
Hydraulic Circuits Required	1	
1 Width of Drum	149 in	3,785 mm
Strap Capacity	12,000 lbs	5,443 kg
Minimum Hitch Pin Size	1.5 in	38 mm
Minimum Clevis Opening	1.5 in	38 mm
Max Operating Pressure	3000, 3000 psi	20,68, 20,68 bar

TONGUE ASSEMBLY

Category 4 Pintle Hitch with 360° Rotation

Gooseneck Hitch with 12" Clearance for 6" to 10" Rollers

ROLLER ASSEMBLY

Drum 3/4" Diameter

Standard Bearing with 1/2" Spacers

Drum is 17" 5" Wide and 17" in Diameter

End Cap 1/2" x 1/2" x 1/2"

ROLLER FRAME

Hardox® 450 Steel Box Blade

Standard Cat Cutting Edge (reversible)

Cat Rollers with 1/2" Spacers

Greaseless Bushings throughout

HYDRAULICS

Pioneer 3000 Couplings, Copper Style Fittings

Caterpillar 4,000 PSI Hydraulic Hose

Two Construction Grade 4,000 PSI Cylinders*

Greaseable Spherical Bearings on Rod Ends

